




 Jumbrella XL



Jumbrella XL

The Jumbrella XL is the extra-large edition. The space covered ranges from 25 m² through 49 m². Our XL-model withstands the highest wind loads and can be equipped with various additional features.

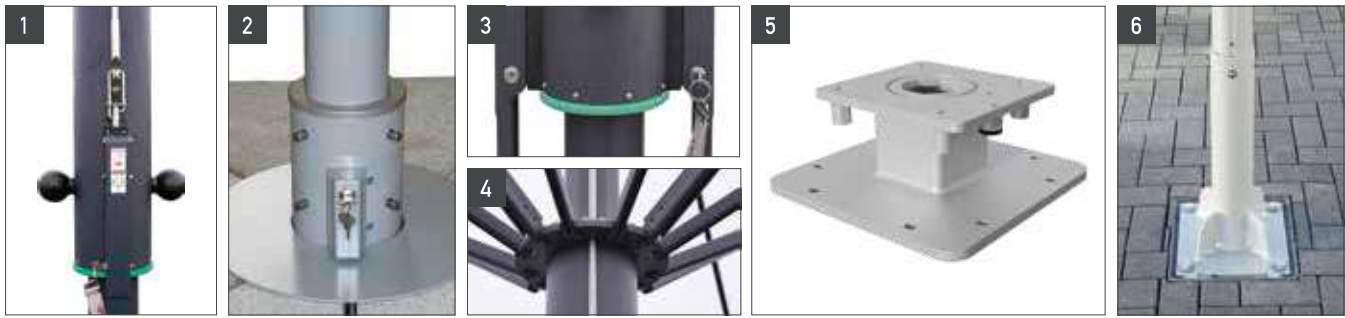

Overview

8 different model sizes ranging from 25 m² through 49 m²

Additional features available e.g.: textile gutters, side panels, impact protection, LED-lighting, heaters, speakers, TV, Wifi, maritime frame edition

Maintenance-free servo-mechanism for failsafe opening and closing of the umbrella

Easy and efficient handling through gradual opening in 4-stages (servo-mechanism) **1**

Perfect, lasting tension as the textile membrane is integrated into the spokes; support spokes for additional stabilization

Excellent sun protection factor UPF 50+; high waterproofness

Individually replaceable spare parts

Printing possible | Available with valance

Comes with theft and anti-opening prevention device **2 3**

Textile Membrane | Covering

betex® 05 | fabric exclusively crafted for Bahama

- 100% polyester fabric with top transparent coating with the OEKO-TEX 100 Standard, Class 1
- 25 contemporary colors | special colors upon request

Preconstraint 302

- PVC coated Polyester 550 Dtex. SERGE FERRARI PRECONSTRAINT® coating technology
- 25 contemporary colors | special colors upon request

Umbrella Frame

Standard frame color in traffic white | RAL 9016, glossy finish or anthracite grey | RAL 7016, extured matte finish

Custom frame finish possible e.g various RAL colors or wooden | Golden Oak finish

Special stability due to hollow profile made of extruded aluminum **4**

Outer pole diameter approx. 95 mm, wall thickness approx. 3.5 mm

Scratch-resistant PES powder-coated center pole, post-baked

Installation Options

Mobile and permanent installation options

Portable stand with flagstones; ideal for changing locations

Steel plate base available for terrace substructures **5**

2-piece in-ground installation; connecting components with tilting hinge **6**

2-piece flat foot mount with tilting hinge; fischer heavy-duty anchoring bolts optionally available

Additional features such as frame modifications for electrical and heating options, spacers, in-ground sleeve extensions

Additional Features




Sizes






All measurements in meters

 round	Ø 7.0			
 square	5.0 × 5.0	5.5 × 5.5	6.0 × 6.0	7.0 × 7.0
 rectangular	6.0 × 5.14	7.0 × 5.0	7.0 × 6.0	

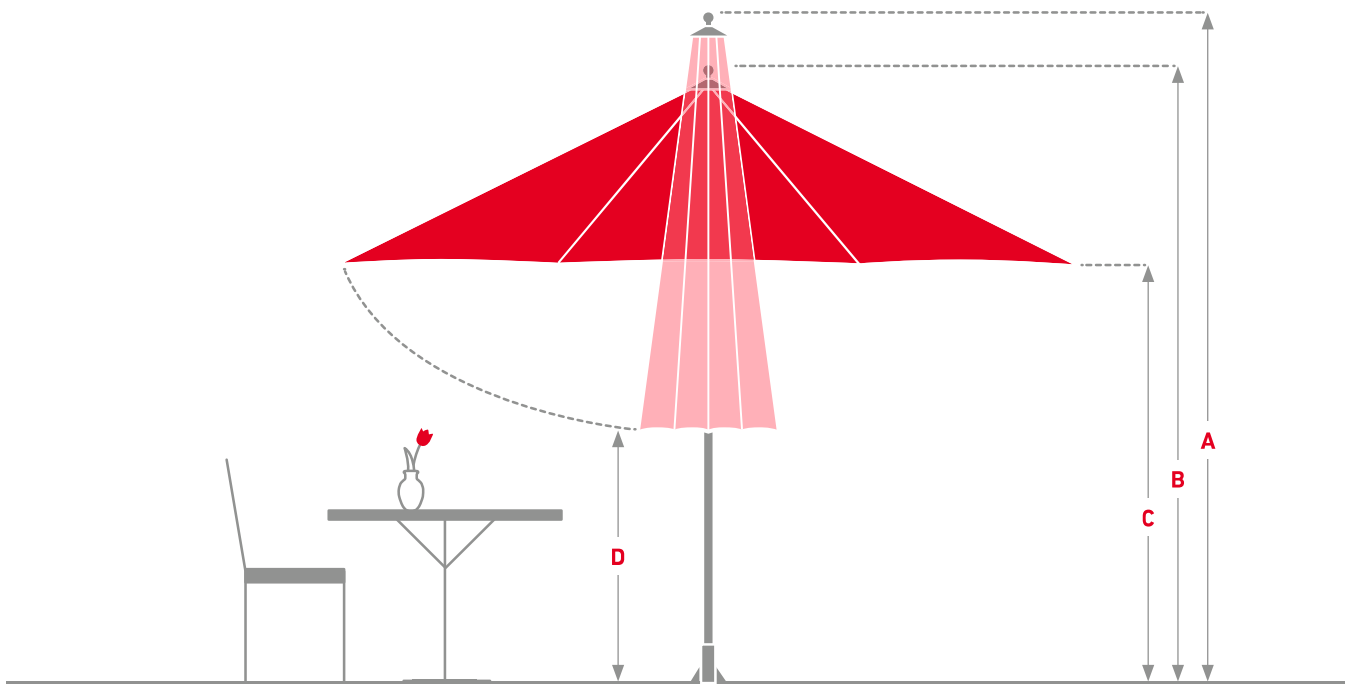Dimensions & Technical Data

Jumbrella XL round & square




					
All measurements are approximate	Ø 7.0 m 12 spokes	5.0 × 5.0 m 12 spokes	5.5 × 5.5 m 12 spokes	6.0 × 6.0 m 12 spokes	7.0 × 7.0 m 12 spokes
Area in m ²	37	25	30.25	36	49
Parasol weight without installation component & packaging, in kg	190	159	164	177	200
Transportgewicht in kg, incl. packaging	251	216	225	242	265
A Height closed* in cm	513	450	489	526	526
B Height opened* in cm	394	354	379	394	394
C Passage height* in cm	250	235	248	250	245
D Ground clearance* in cm	140	83	85	80	13
Max. permitted wind velocities fully opened parasol, km/h Permanent/Mobile	80/59	100/72	90/65	80/59	60/-


* All measurements refer to the use with a permanent installation option (in-ground sleeve) ** For the edition with valance, the measurements increase by 30 cm.

Dimensions & Technical Data

Jumbrella XL rectangular

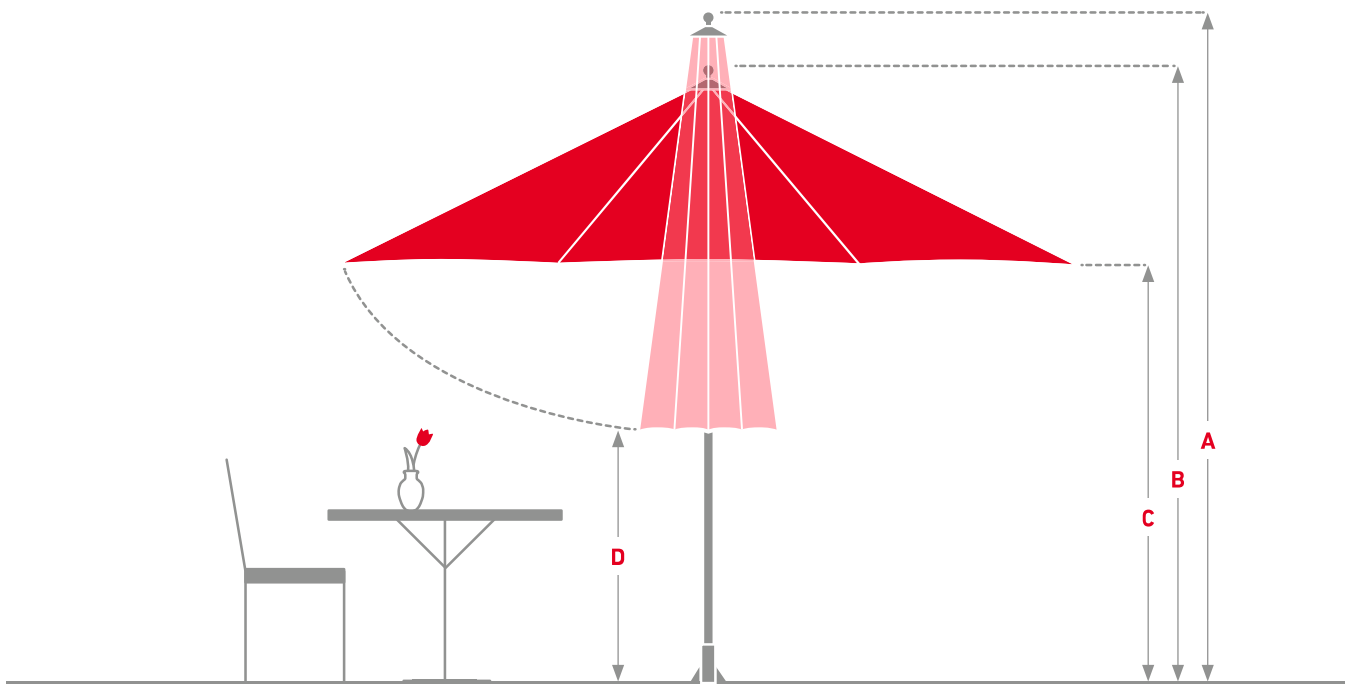

* All measurements refer to the use with a permanent installation option (in-ground sleeve) ** For the edition with valance, the measurements increase by 30 cm.

	 6.0 × 5.14 m 12 spokes	 7.0 × 5.0 m 12 spokes	 7.0 × 6.0 m 12 spokes
All measurements are approximate			
Area in m ²	30.84	35	42
Parasol weight without installation component & packaging, in kg	161	175	190
Transportgewicht in kg, incl. packaging	226	240	255
A Height closed* in cm	515	520	526
B Height opened* in cm	385	390	395
C Passage height* in cm	250	250	250
D Ground clearance* in cm	98	70	45
Max. permitted wind velocities fully opened parasol, km/h Permanent/Mobile	90/59	70/39	70/-